



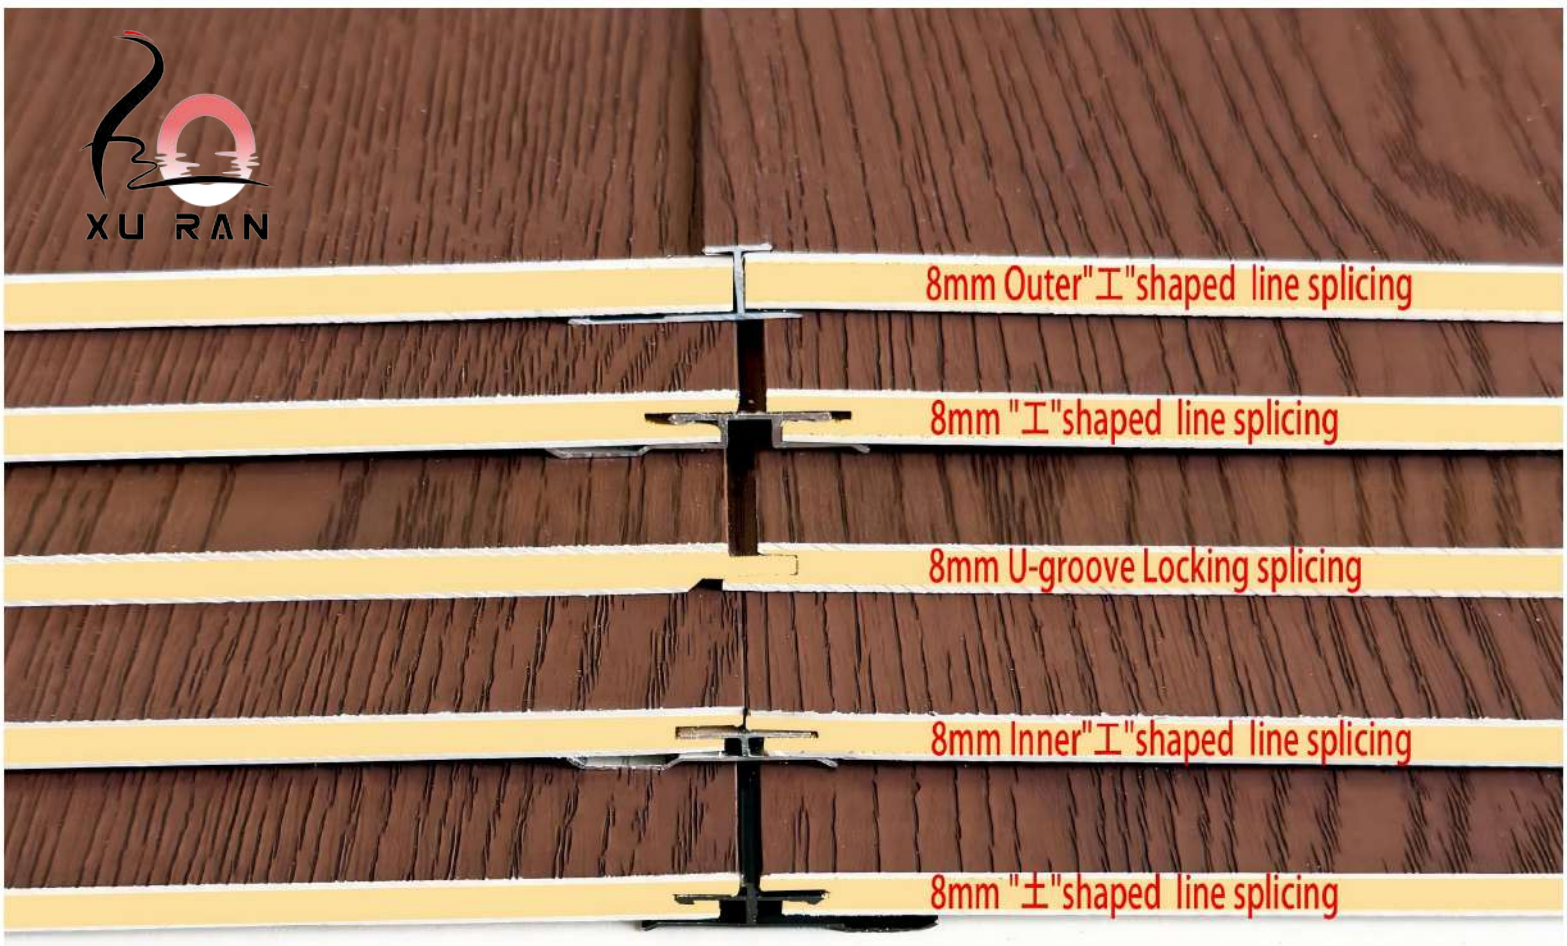


WPC wall panel

WPC uses polyethylene, polypropylene, and polyvinyl chloride instead of commonly used resin adhesives to mix with more than 50% of waste plant fibers such as wood powder, rice husk, and straw to form new wood materials.

Then, it produces boards or profiles through plastic processing processes such as extrusion, molding, and injection molding.

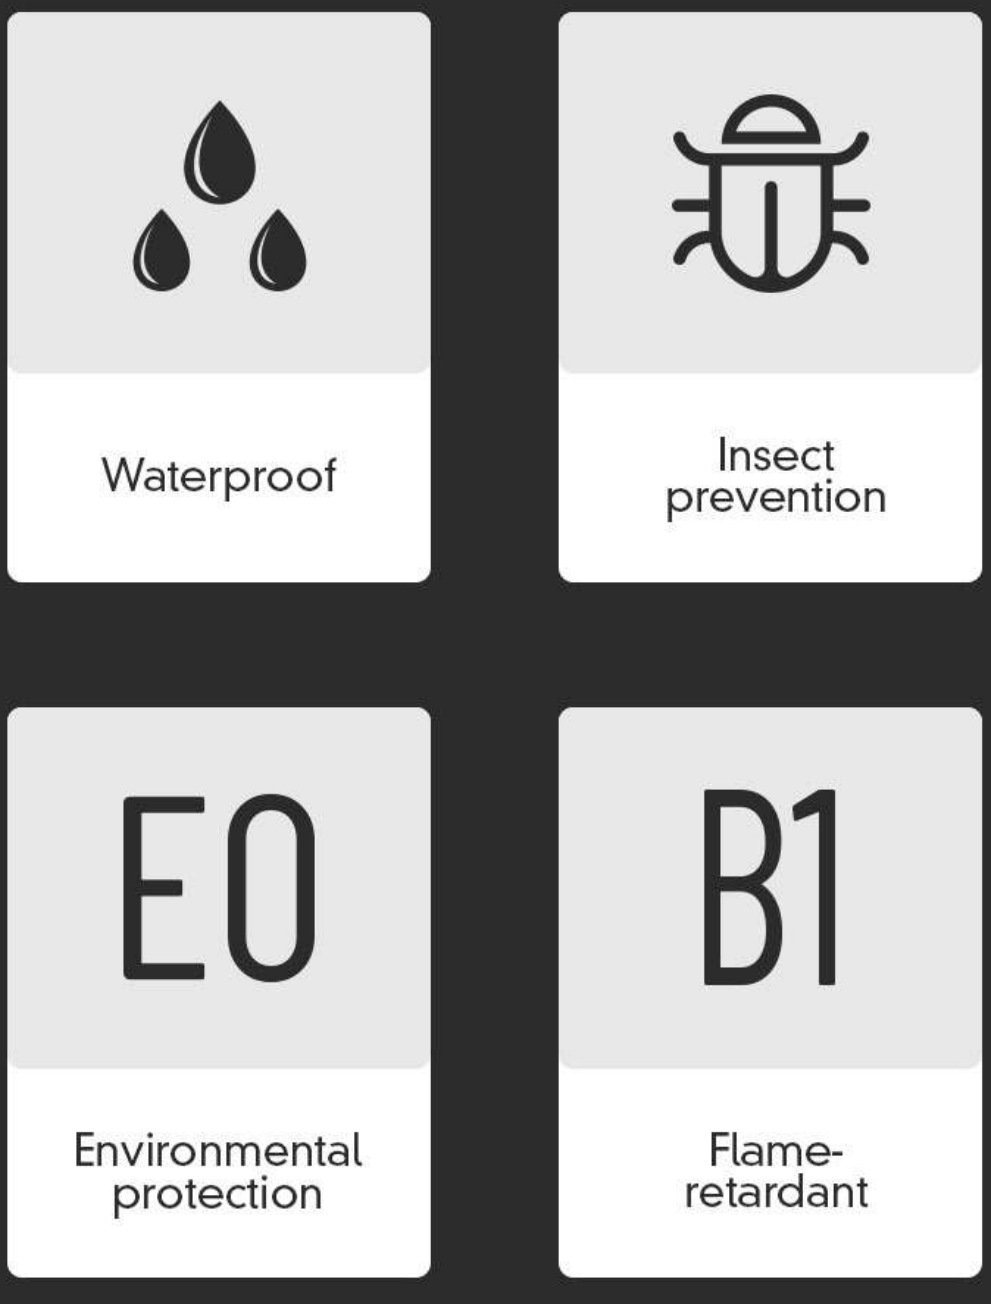




Thickness: 5mm&8mm



Bending and shaping




Waterproof and moisture-proof

PRODUCTS

LENGTH AND WIDTH: 1100*2800(mm)
THICKNESS: 5mm&8mm
ENVIRONMENTAL PROTECTION GRADE: ENF
FIRE RATING: B1
PERFORMANCE: waterproof&bendable

INSTALL

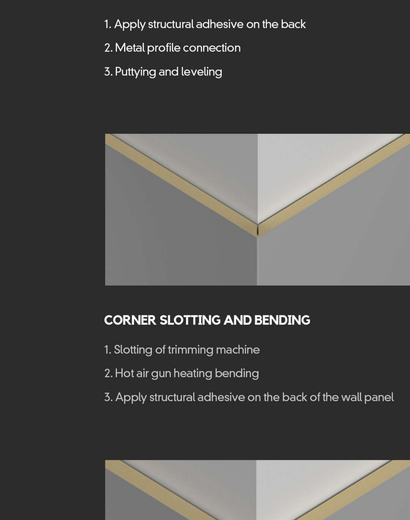


1&4. Puttying and leveling
2. Apply structural adhesive on the back
3. Metal profile connection
5. Rough wall

1. Apply structural adhesive on the back
2. Metal profile connection
3. Puttying and leveling



CORNER SLOTTING AND BENDING

1. Slotting of trimming machine
2. Hot air gun heating bending
3. Apply structural adhesive on the back of the wall panel



Apply structural adhesive on the back


▼ PACKING METHOD


饰面板 / WPC WALL PANEL


托 盘 / PALLET


20' STD

89m 19'4 "2 22 35m 79" 1 ,170 39m 71 0 "4,89	m³ W 2. f³H: 2.	0 kg 21 8 4 lb 48.1	50kg 33. 2 71 lb8080

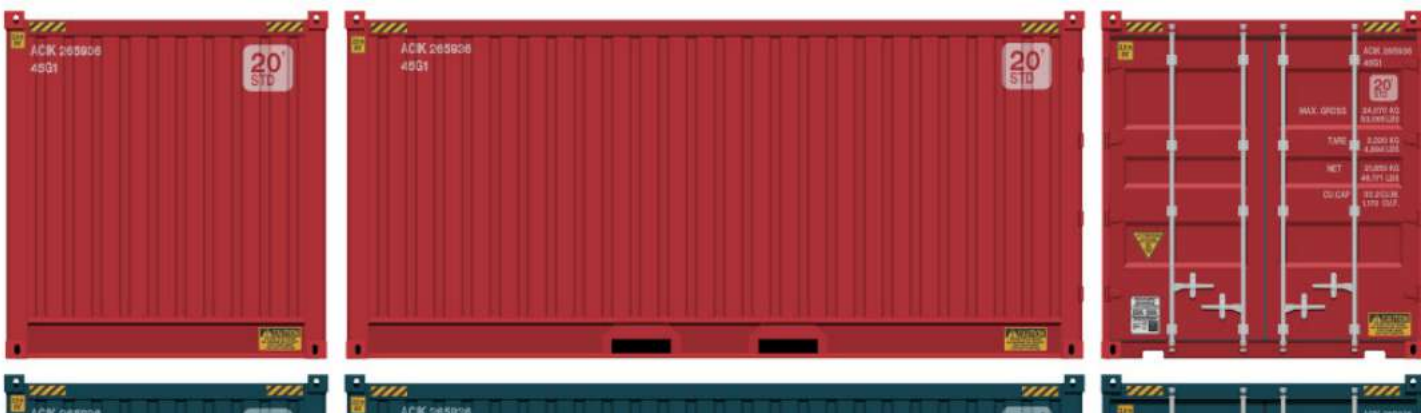

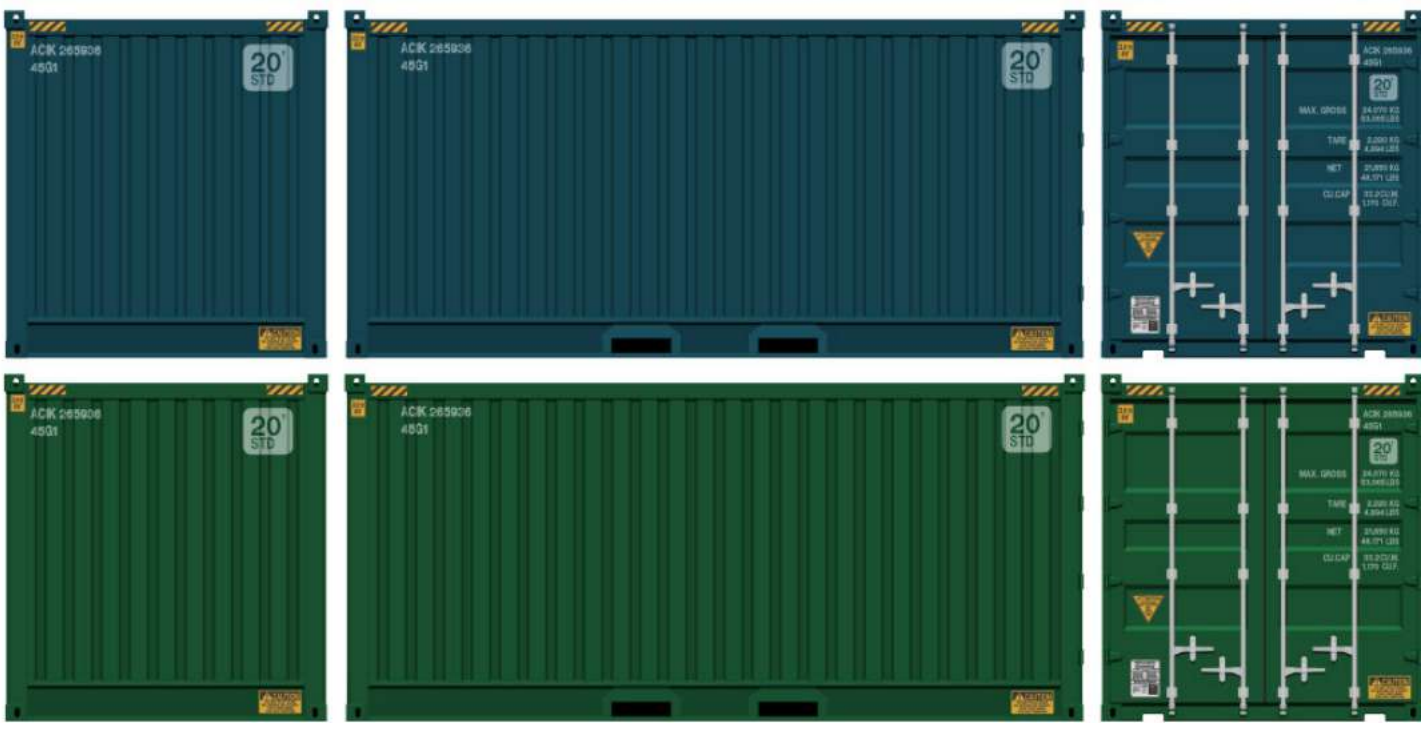

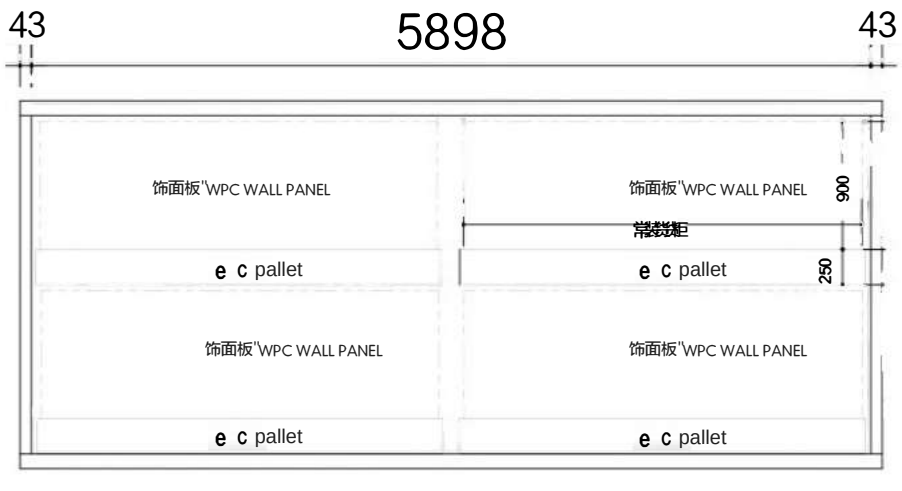


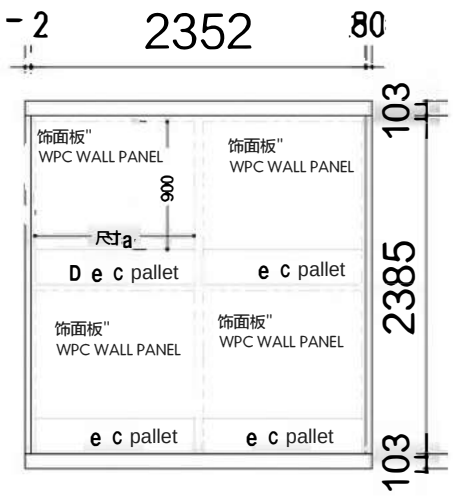


40' 352

6' 26,.7 k	3m 9' g 3.74 kg	12,.0 : 2.35m	67.7 m³W
7 9" STD 2 .91 9 96 lb 0 4 32 3 托盘重量 40	5 lb5 8. 1 2032	1 0 8, 24 正常货柜	: 2.39m 7 寸



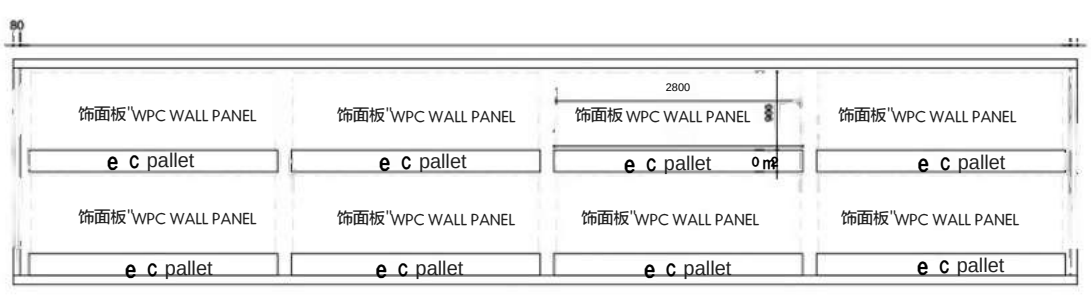



Item	Specification	Per Pallet	20GP	40HQ
5mm wall panel	1.1×2.8 m	100 sheets	400 sheets (4 pallets)	800 sheets (8 pallets)
8mm wall panel	1.1×2.8 m	60 sheets	240 sheets (4 pallets)	480 sheets (8 pallets)

STONE SERIES CASE ▼

#

STONE SERIES
51001

WPC WALL PANEL



STONE SERIES 51001

NAME: WPC wall panel

MATERIAL: Nanofiber powder

LENGTH AND WIDTH: 1100*2800(mm)

THICKNESS: 5mm&8mm

ENVIRONMENTAL PROTECTION GRADE: ENF

FIRE RATING: B1

PERFORMANCE: waterproof&bendable